

FC magnetic starters



Technical characteristics

Compliance with the IEC 60947-4-1 standard

| Type starter | Mounting | Height | Capacity the main ones of contacts on AS-3 P, kW | | | Mounting | Power coil activation at Un, P, W | | Number and type of additional contacts | Dimensions | Weight | | | |
|--------------|--------------|--------|--|------|------|----------|--------------------------------------|-------------------|--|-------------------|------------------|------------|------|--------|
| | | | 230V | 400V | 690V | | work-bathing | Tomorrow-semolina | | | | | | |
| | | | | | | | | | | | | Dimensions | | Weight |
| FC 1/6 | ~230/400/690 | 690 | 20 | 6 | 1.5 | 3 | 4 | 40 | 7 | 1NO/1NC | 1200 | 1 | 10 | |
| FC 1/9 | | | 22 | 9 | 2.2 | 4 | 5.5 | 60 | 9 | 1NO/1NC 1200 | 1 | 10 | 0.31 | |
| FC 1/10 | | | 23 | 10 | 2.5 | 4.5 | 6 | 60 | 9 | 1NO/1NC 1200 | 1 | 10 | 0.31 | |
| FC 1/12 | | | 24 | 12 | 3 | 5.5 | 7.5 | 60 | 9 | 1NO/1NC 1200 | 1 | 10 | 0.31 | |
| FC 1/16 | | | 28 | 16 | 4 | 7.5 | 11 | 60 | 9 | 1NO/1NC 1200 | 1 | 10 | 0.31 | |
| FC 1/18 | | | 30 | 18 | 5 | 8.5 | 13 | 60 | 9 | 1NO/1NC 1200 1200 | 1 | 10 | 0.31 | |
| FC 2/25 | | | 45 | 25 | 6 | 11 | 15 | 122 | 12 | 1NO/1NC | 1 | 10 | 0.54 | |
| FC 3/32 | | | 55 | 32 | 8 | 15 | 18.5 | 122 | 12 | 1NO/1NC 1200 | 0.8 | 8 | 0.65 | |
| FC 4/40 | | | 70 | 40 | 11 | 18.6 | 22 | 175 | 20 | 1NO+1NC 1200 | 0.6 | 8 | 1.1 | |
| FC 4/50 | | | 100 | 50 | 15 | 22 | 30 | 175 | 20 | 1NO+1NC 1200 | 0.6 | 8 | 1.1 | |
| FC 4/63 | | 115 | 18.5 | 30 | 115 | 65 | 18.5 | 30 | 175 | 20 | 1NO+1NC 1200 | 0.6 | 8 | 1.1 |
| FC 4/65 | | | | | | 37 | | | 175 | 20 | 1NO+1NC 1200 0.6 | | 8 | 1.1 |
| FC 4/75 | | 125 | 75 | 22 | 37 | 45 | 175 | 20 | 1NO+1NC 1200 | 0.6 | 8 | 1.1 | | |
| FC 4/80 | | 80 | 80 | 22 | 37 | 55 | 175 | 20 | 1NO+1NC 1200 0.6 1200 1.2 | | 8 | 1.1 | | |
| FC 5/63 | | 80 | 63 | 18.5 | 30 | 55 | 450 | 55 | 4NO+2NC | | 10 | 2.65 | | |
| FC 5/80 | | 80 | 80 | 22 | 37 | 55 | 450 | 55 | 4NO+2NC 1200 | 1.2 | 10 | 2.65 | | |
| FC 5/100 | | 125 | 100 | 30 | 45 | 75 | 450 | 55 | 4NO+2NC 1200 | 1.2 | 10 | 2.65 | | |
| FC 5/125 | | 125 | 125 | 37 | 55 | 75 | 450 | 55 | 4NO+2NC 1200 | 1.2 | 10 | 2.65 | | |
| FC 6/160 | | 265 | 160 | 45 | 75 | 110 | 880 | 88 | 4NO+2NC 1200 | 1.2 | 10 | 5.2 | | |
| FC 6/200 | | 265 | 200 | 55 | 90 | 110 | 880 | 88 | 4NO+2NC 1200 | 1.2 | 10 | 5.2 | | |
| FC 6/250 | 265 | 250 | 75 | 132 | 110 | 880 | 88 | 4NO+2NC 1200 | 1.2 | 10 | 5.2 | | | |
| FC 6/265 | 265 | 265 | 85 | 147 | 110 | 880 | 88 | 4NO+2NC 600 0.6 | | 6 | 10.05 | | | |
| FC 7/315 | 500 | 315 | 90 | 160 | 300 | 1170 | 152 | 4NO+2NC 600 | 0.6 | 6 | 10.05 | | | |
| FC 7/400 | 500 | 400 | 110 | 220 | 300 | 1170 | 152 | 4NO+2NC 600 | 0.6 | 6 | 10.05 | | | |
| FC 7/ 500 | 500 | 500 | 150 | 280 | 300 | 1170 | 170 | 4NO+2NC 600 0.3 | | 3 | 10.05 | | | |

| Cross-section of connecting conductors, mm | 2 | FC1 | FC2 | FC3 | FC4 | FC5 | FC6 | FC7 |
|--|---|-----|-----|--------|--------|-------|-------|-------|
| Main contacts | | 1-4 | 1-4 | 2.5-16 | 2.5-16 | - | - | - |
| Auxiliary contacts | | 1-4 | 1-4 | 1-2.5 | 1-2.5 | 1-2.5 | 1-2.5 | 1-2.5 |



FC magnetic starters

FC1



| Code order | Full name | Packaging, pcs | | Gross weight, kg | | |
|------------|---------------------------------------|----------------|-----|--------------------|-------|--------|
| | | Packaging | Box | Unit Packaging Box | | |
| FC10012110 | Magnetic starter FC-1/12A cat. AC110V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10012230 | Magnetic starter FC-1/12A cat. AC230V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10012024 | Magnetic starter FC-1/12A cat. AC24V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10012036 | Magnetic starter FC-1/12A cat. AC36V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10012400 | Magnetic starter FC-1/12A cat. AC400V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10012042 | Magnetic starter FC-1/12A cat. AC42V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016110 | Magnetic starter FC-1/16A cat. AC110V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016230 | Magnetic starter FC-1/16A cat. AC230V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016024 | Magnetic starter FC-1/16A cat. AC24V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016036 | Magnetic starter FC-1/16A cat. AC36V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016400 | Magnetic starter FC-1/16A cat. AC400V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10016042 | Magnetic starter FC-1/16A cat. AC42V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006110 | Magnetic starter FC-1/6A cat. AC110V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006230 | Magnetic starter FC-1/6A cat. AC230V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006024 | Magnetic starter FC-1/6A cat. AC24V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006036 | Magnetic starter FC-1/6A cat. AC36V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006400 | Magnetic starter FC-1/6A cat. AC400V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10006042 | Magnetic starter FC-1/6A cat. AC42V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009110 | Magnetic starter FC-1/9A cat. AC110V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009230 | Magnetic starter FC-1/9A cat. AC230V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009024 | Magnetic starter FC-1/9A cat. AC24V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009036 | Magnetic starter FC-1/9A cat. AC36V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009400 | Magnetic starter FC-1/9A cat. AC400V | 1 | 50 | 0.340 | 0.340 | 17,000 |
| FC10009042 | Magnetic starter FC-1/9A cat. AC42V | 1 | 50 | 0.340 | 0.340 | 17,000 |

FC2



| | | | | | | |
|------------|---------------------------------------|---|----|-------|-------|--------|
| FC20025110 | Magnetic starter FC-2/25A cat. AC110V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025230 | Magnetic starter FC-2/25A cat. AC230V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025024 | Magnetic starter FC-2/25A cat. AC24V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025036 | Magnetic starter FC-2/25A cat. AC36V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025400 | Magnetic starter FC-2/25A cat. AC400V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025042 | Magnetic starter FC-2/25A cat. AC42V | 1 | 40 | 0.560 | 0.560 | 22,400 |
| FC20025048 | Magnetic starter FC-2/25A cat. AC48V | 1 | 40 | 0.560 | 0.560 | 22,400 |

FC3



| | | | | | | |
|------------|---------------------------------------|---|----|-------|-------|--------|
| FC30032110 | Magnetic starter FC-3/32A cat. AC110V | 1 | 40 | 0.680 | 0.680 | 27,200 |
| FC30032230 | Magnetic starter FC-3/32A cat. AC230V | 1 | 40 | 0.680 | 0.680 | 27,200 |
| FC30032024 | Magnetic starter FC-3/32A cat. AC24V | 1 | 40 | 0.680 | 0.680 | 27,200 |
| FC30032036 | Magnetic starter FC-3/32A cat. AC36V | 1 | 40 | 0.680 | 0.680 | 27,200 |
| FC30032400 | Magnetic starter FC-3/32A cat. AC400V | 1 | 40 | 0.680 | 0.680 | 27,200 |
| FC30032042 | Magnetic starter FC-3/32A cat. AC42V | 1 | 40 | 0.680 | 0.680 | 27,200 |

FC

FC magnetic starters

FC4



| Code order | Complete name | Packaging, pcs | | | Gross weight, kg | |
|------------|---------------------------------------|----------------|-----|-------|------------------|--------|
| | | Packaging | Box | Unit | Packaging | Box |
| FC40040110 | Magnetic starter FC-4/40A cat. AC110V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040230 | Magnetic starter FC-4/40A cat. AC230V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040024 | Magnetic starter FC-4/40A cat. AC24V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040036 | Magnetic starter FC-4/40A cat. AC36V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040400 | Magnetic starter FC-4/40A cat. AC400V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040042 | Magnetic starter FC-4/40A cat. AC42V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40040048 | Magnetic starter FC-4/40A cat. AC48V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050110 | Magnetic starter FC-4/50A cat. AC110V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050230 | Magnetic starter FC-4/50A cat. AC230V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050024 | Magnetic starter FC-4/50A cat. AC24V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050036 | Magnetic starter FC-4/50A cat. AC36V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050400 | Magnetic starter FC-4/50A cat. AC400V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40050042 | Magnetic starter FC-4/50A cat. AC42V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063110 | Magnetic starter FC-4/63A cat. AC110V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063230 | Magnetic starter FC-4/63A cat. AC230V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063024 | Magnetic starter FC-4/63A cat. AC24V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063036 | Magnetic starter FC-4/63A cat. AC36V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063400 | Magnetic starter FC-4/63A cat. AC400V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40063042 | Magnetic starter FC-4/63A cat. AC42V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075110 | Magnetic starter FC-4/75A cat. AC110V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075230 | Magnetic starter FC-4/75A cat. AC230V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075024 | Magnetic starter FC-4/75A cat. AC24V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075036 | Magnetic starter FC-4/75A cat. AC36V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075400 | Magnetic starter FC-4/75A cat. AC400V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40075042 | Magnetic starter FC-4/75A cat. AC42V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40080230 | Magnetic starter FC-4/80A cat. AC230V | 1 | 20 | 1,150 | 1,150 | 23,000 |
| FC40080400 | Magnetic starter FC-4/80A cat. AC400V | 1 | 20 | 1,150 | 1,150 | 23,000 |

FC

FC5



| | | | | | | |
|------------|--|---|---|-------|-------|--------|
| FC50100110 | Magnetic starter FC-5/100A cat. AC110V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50100230 | Magnetic starter FC-5/100A cat. AC230V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50100024 | Magnetic starter FC-5/100A cat. AC24V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50100036 | Magnetic starter FC-5/100A cat. AC36V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50100400 | Magnetic starter FC-5/100A cat. AC400V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50125110 | Magnetic starter FC-5/125A cat. AC110V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50125230 | Magnetic starter FC-5/125A cat. AC230V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50125036 | Magnetic starter FC-5/125A cat. AC36V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50125400 | Magnetic starter FC-5/125A cat. AC400V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50063110 | Magnetic starter FC-5/63A cat. AC110V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50063230 | Magnetic starter FC-5/63A cat. AC230V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50063400 | Magnetic starter FC-5/63A cat. AC400V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50080110 | Magnetic starter FC-5/80A cat. AC110V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50080230 | Magnetic starter FC-5/80A cat. AC230V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50080024 | Magnetic starter FC-5/80A cat. AC24V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50080036 | Magnetic starter FC-5/80A cat. AC36V | 1 | 6 | 2,850 | 2,850 | 17,100 |
| FC50080400 | Magnetic starter FC-5/80A cat. AC400V | 1 | 6 | 2,850 | 2,850 | 17,100 |

FC magnetic starters

FC6



| Code order | Complete name | Packaging, pcs | | | Gross weight, kg | |
|------------|--|----------------|-----|-------|------------------|--------|
| | | Packaging | Box | Unit | Packaging | Box |
| FC60160110 | Magnetic starter FC-6/160A cat. AC110V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60160230 | Magnetic starter FC-6/160A cat. AC230V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60160400 | Magnetic starter FC-6/160A cat. AC400V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60185230 | Magnetic starter FC-6/185A cat. AC230V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60200110 | Magnetic starter FC-6/200A cat. AC110V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60200230 | Magnetic starter FC-6/200A cat. AC230V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60200400 | Magnetic starter FC-6/200A cat. AC400V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60225230 | Magnetic starter FC-6/225A cat. AC230V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60250110 | Magnetic starter FC-6/250A cat. AC110V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60250230 | Magnetic starter FC-6/250A cat. AC230V | 1 | 4 | 5,650 | 5,650 | 22,600 |
| FC60250400 | Magnetic starter FC-6/250A cat. AC400V | 1 | 4 | 5,650 | 5,650 | 22,600 |

FC7




| | | | | | | |
|------------|--|---|---|--------|--------|--------|
| FC70315110 | Magnetic starter FC-7/315A cat. AC110V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70315230 | Magnetic starter FC-7/315A cat. AC230V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70315400 | Magnetic starter FC-7/315A cat. AC400V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70400230 | Magnetic starter FC-7/400A cat. AC230V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70400400 | Magnetic starter FC-7/400A cat. AC400V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70500110 | Magnetic starter FC-7/500A cat. AC110V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70500230 | Magnetic starter FC-7/500A cat. AC230V | 1 | 2 | 10,970 | 10,970 | 21,940 |
| FC70500400 | Magnetic starter FC-7/500A cat. AC400V | 1 | 2 | 10,970 | 10,970 | 21,940 |

Additional equipment for FC magnetic starters

Additional front-end contacts for FC1-4 magnetic starters



Additional side contacts for FC1-4 magnetic starters

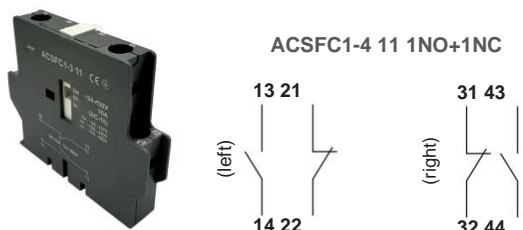

Additional side contacts for FC4 magnetic starters


Order code

Name

Installation method

| | | |
|-----------|--|-----------------------|
| ACTFC1401 | Additional contact of the NC front execution to FC1-4 ACTFC1-4 01 | Upper (frontal) |
| ACTFC1410 | Additional contact of front execution NO to FC1-4 ACTFC1-4 10 | Upper (frontal) |
| ACTFC1422 | Additional front contact 2NO+2NC to FC1-4 ACTFC1-4 22 Additional front contact | Upper (frontal) Upper |
| ACTFC1440 | 4NO to FC1-4 ACTFC1-4 40 | (frontal) |
| ACSFC1411 | Additional contact of side execution NC+NO for FC1-4 ACSFC1-4 11 | Side |

Installation and connection of additional equipment to FC magnetic starters

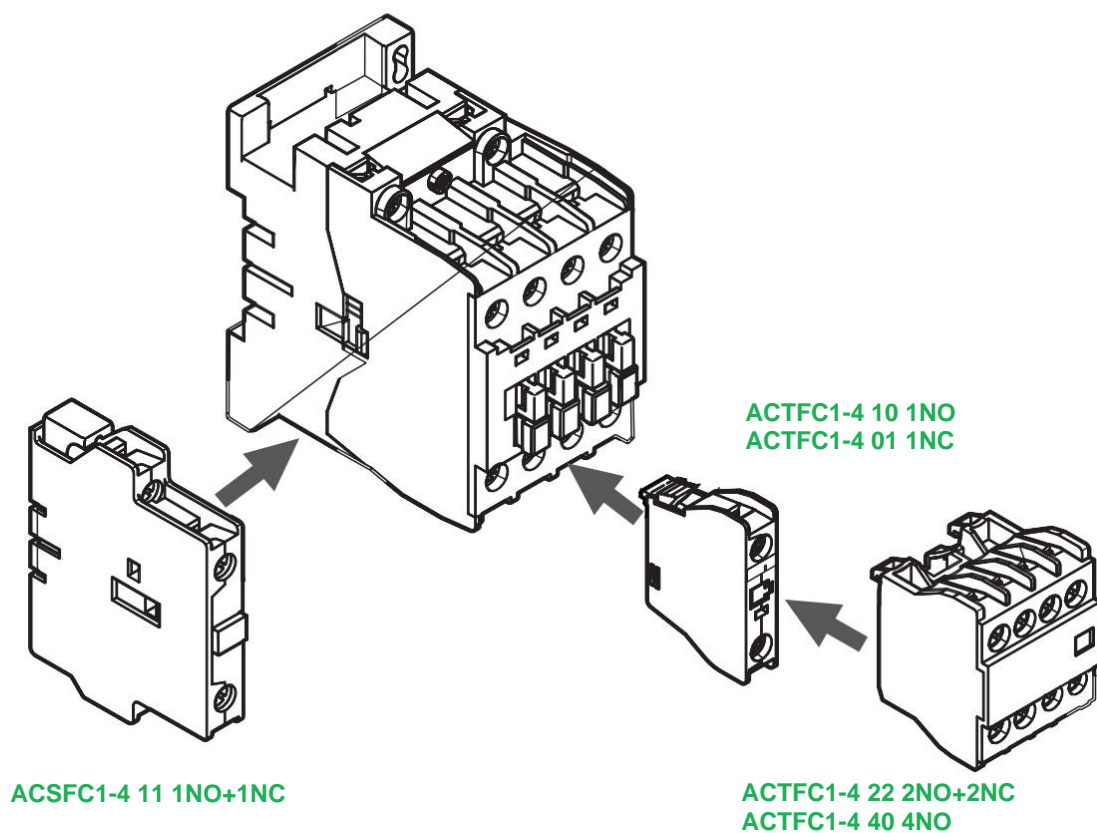

FC



Rit control coils for FC magnetic starters

The starter is controlled using an AC voltage control coil
24, 36, 42, 110, 230, 400V.



| Code order | Full name | Packaging, pcs | | Gross weight, kg | | |
|---------------|------------------------------|----------------|-----|--------------------|-------|-------|
| | | Packaging | Box | Unit Packaging Box | | |
| RitFC1 | | | | | | |
| RitFC1110 | Control coil Rit to FC1 110V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC1230 | Control coil Rit to FC1 230V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC1024 | Control coil Rit to FC1 24V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC1036 | Control coil Rit to FC1 36V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC1400 | Control coil Rit to FC1 400V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC1042 | Control coil Rit to FC1 42V | 1 | 1 | 0.080 | 0.080 | 0.080 |
| RitFC2 | | | | | | |
| RitFC2110 | Control coil Rit to FC2 110V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC2230 | Control coil Rit to FC2 230V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC2024 | Control coil Rit to FC2 24V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC2036 | Control coil Rit to FC2 36V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC2400 | Control coil Rit to FC2 400V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC2042 | Control coil Rit to FC2 42V | 1 | 1 | 0.110 | 0.110 | 0.110 |
| RitFC3 | | | | | | |
| RitFC3110 | Control coil Rit to FC3 110V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC3230 | Control coil Rit to FC3 230V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC3024 | Control coil Rit to FC3 24V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC3036 | Control coil Rit to FC3 36V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC3400 | Control coil Rit to FC3 400V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC3042 | Control coil Rit to FC3 42V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4 | | | | | | |
| RitFC4110 | Control coil Rit to FC4 110V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4230 | Control coil Rit to FC4 230V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4024 | Control coil Rit to FC4 24V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4036 | Control coil Rit to FC4 36V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4400 | Control coil Rit to FC4 400V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4042 | Control coil Rit to FC4 42V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC4048 | Control coil Rit to FC4 48V | 1 | 1 | 0.120 | 0.120 | 0.120 |
| RitFC5 | | | | | | |
| RitFC5110 | Control coil Rit to FC5 110V | 1 | 1 | 0.290 | 0.290 | 0.290 |
| RitFC5230 | Control coil Rit to FC5 230V | 1 | 1 | 0.290 | 0.290 | 0.290 |
| RitFC5024 | Control coil Rit to FC5 24V | 1 | 1 | 0.290 | 0.290 | 0.290 |
| RitFC5036 | Control coil Rit to FC5 36V | | | 0.290 | 0.000 | 0.000 |
| RitFC5400 | Control coil Rit to FC5 400V | 1 | 1 | 0.290 | 0.290 | 0.290 |
| RitFC6 | | | | | | |
| RitFC6110 | Control coil Rit to FC6 110V | 1 | 1 | 0.430 | 0.430 | 0.430 |
| RitFC6230 | Control coil Rit to FC6 230V | 1 | 1 | 0.430 | 0.430 | 0.430 |
| RitFC6400 | Control coil Rit to FC6 400V | 1 | 1 | 0.430 | 0.430 | 0.430 |
| RitFC7 | | | | | | |
| RitFC7110 | Rit control coil to FC7 110V | 1 | 1 | 0.850 | 0.850 | 0.850 |
| RitFC7230 | Control coil Rit to FC7 230V | 1 | 1 | 0.850 | 0.850 | 0.850 |
| RitFC7400 | Control coil Rit to FC7 400V | 1 | 1 | 0.850 | 0.850 | 0.850 |

FC

