




Technical characteristics

Type	RMD16
Compliance with the standard	IEC 60947-5-1
Nominal working voltage of contacts Un, V Nominal current In,	~250
A Nominal frequency f, Hz Cross	16
section of connecting conductors,	50/60
mm	until 6
Mounting on a DIN rail	TN35
Comb bus connection Protection	No
degree	IP20

Functions

- Provision of electricity during repair or preventive works in the switchboard.

Overall dimensions RMD16

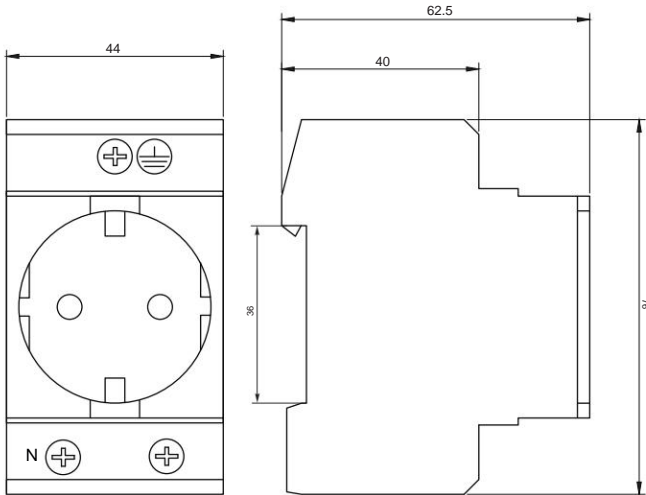

Code order	Full name	Packaging, pcs		Unit	Gross weight, kg	
		Packaging Box			Packaging	Box
RMD16	RMD16 modular socket	5	100	0.130	0.650	13,000

